

## 100V N-channel Power MOSFET


### General Features

- Proprietary New Trench Technology
- Low Gate Charge Minimize Switching Loss
- Fast Recovery Body Diode
- RoHS Compliant
- Halogen-free available

<b>BV<sub>DSX</sub></b>	<b>R<sub>DS(ON)</sub>, TYP (10V)</b>	<b>I<sub>D</sub></b>
<b>100V</b>	<b>5.8mΩ</b>	<b>76A</b>

### Applications

- Synchronous Rectification
- Power Management
- Load Switch

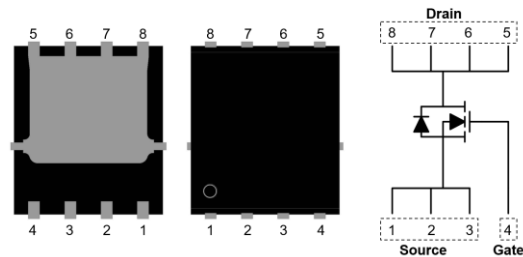**PDFN5x6**


### Ordering Information

Part Number	Package	Marking	Remark
FTF100N7P5GX	PDFN5x6	100N7P5GX	Halogen Free

### Absolute Maximum Ratings

TA =25°C unless otherwise specified

Symbol	Parameter	FTF100N7P5GX	Unit
V <sub>DSS</sub>	Drain-to-Source Voltage <sup>[1]</sup>	100	V
V <sub>GSS</sub>	Gate-to-Source Voltage	±20	V
I <sub>D</sub>	Continuous Drain Current	76	A
	Continuous Drain Current at T <sub>C</sub> =100°C	48	
I <sub>DM</sub>	Pulsed Drain Current at V <sub>GS</sub> =10V <sup>[2]</sup>	304	
E <sub>AS</sub>	Single Pulse Avalanche Energy (V <sub>DD</sub> =50V, V <sub>GS</sub> =10V, R <sub>G</sub> =25Ω, L=1mH)	105	mJ
P <sub>D</sub>	Power Dissipation	91	W
	Derating Factor above 25°C	0.73	W/°C
T <sub>J</sub> and T <sub>STG</sub>	Operating and Storage Temperature Range	-55 to 150	°C

Caution: Stresses greater than those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device.

### Thermal Characteristics

Symbol	Parameter	FTF100N7P5GX	Unit
R <sub>θJC</sub>	Thermal Resistance, Junction-to-Case	1.4	°C/W
R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient	63	

## Electrical Characteristics

### OFF Characteristics

 $T_A = 25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$BV_{DSS}$	Drain-to-Source Breakdown Voltage	100	--	--	V	$V_{GS} = 0V, I_D = 250\mu A$
$I_{DSS}$	Drain-to-Source Leakage Current	--	--	1	$\mu A$	$V_{DS} = 100V, V_{GS} = 0V$
$I_{GSS}$	Gate-to-Source Leakage Current	--	--	$\pm 100$	nA	$V_{GS} = \pm 20V, V_{DS} = 0V$

### ON Characteristics

 $T_A = 25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance [3]	--	5.8	7.5	m $\Omega$	$V_{GS} = 10V, I_D = 20A$
		--	7.9	11		$V_{GS} = 4.5V, I_D = 20A$
$V_{GS(TH)}$	Gate Threshold Voltage	1.0	--	3.0	V	$V_{DS} = V_{GS}, I_D = 250\mu A$

### Dynamic Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$C_{iss}$	Input Capacitance	--	3729	--	pF	$V_{GS} = 0V,$ $V_{DS} = 30V,$ $f = 1.0MHz$
$C_{rss}$	Reverse Transfer Capacitance	--	64	--		
$C_{oss}$	Output Capacitance	--	1130	--		
$Q_g$	Total Gate Charge	--	35	--	nC	$V_{DD} = 50V,$ $I_D = 20A, V_{GS} = 4.5V$
		--	67	--		
$Q_{gs}$	Gate-to-Source Charge	--	13	--		$V_{DD} = 50V,$ $I_D = 20A, V_{GS} = 10V$
$Q_{gd}$	Gate-to-Drain (Miller) Charge	--	14	--		

### Resistive Switching Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$t_{d(on)}$	Turn-on Delay Time	--	25	--	ns	$V_{DD} = 50V$ $I_D = 20A$ $V_{GS} = 10V$ $R_G = 6.0\Omega$ $R_L = 2.5\Omega$
$t_{rise}$	Rise Time	--	47	--		
$t_{d(off)}$	Turn-off Delay Time	--	64	--		
$t_{fall}$	Fall Time	--	23	--		

### Source-Drain Diode Characteristics

 $T_A = 25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$I_{SD}$	Continuous Source Current	--	--	76	A	Maximum Ratings
$V_{SD}$	Diode Forward Voltage	--	--	1.0	V	$I_S = 1.0A, V_{GS} = 0V$
$t_{rr}$	Reverse Recovery Time	--	55	--	ns	$V_{GS} = 0V$ $I_F = 50A, di/dt = 150A/\mu s$
$Q_{rr}$	Reverse Recovery Charge	--	129	--	nC	







NOTE:





[1]  $T_J = 25^\circ\text{C}$  to  $150^\circ\text{C}$ 


[2] Repetitive rating, pulse width limited by maximum junction temperature

[3] Pulse width  $\leq 380\mu s$ ; duty cycle  $\leq 2\%$

## Typical Characteristics

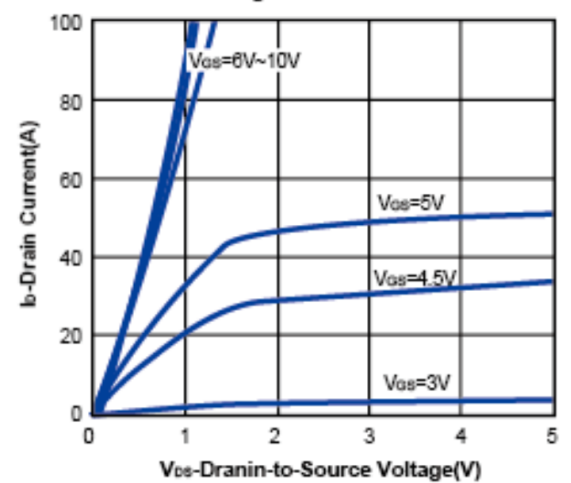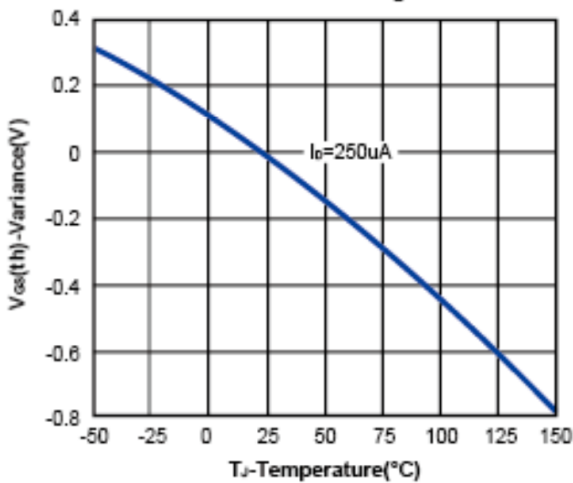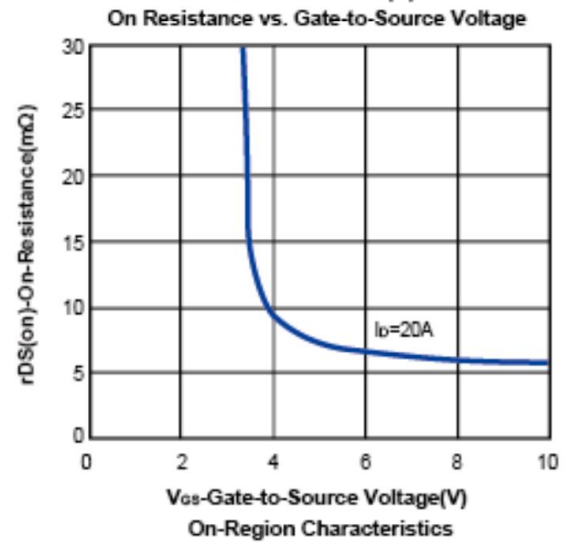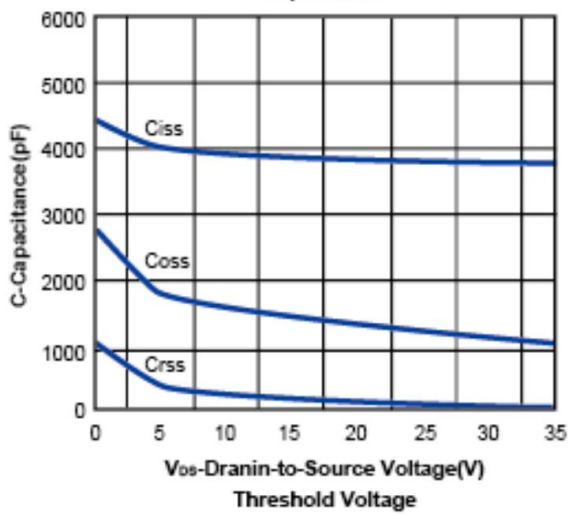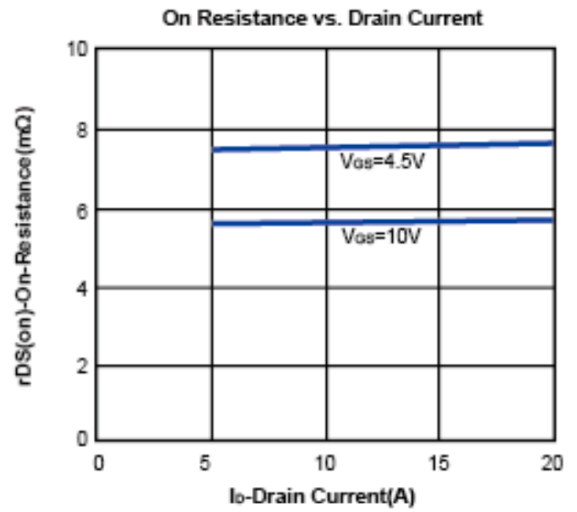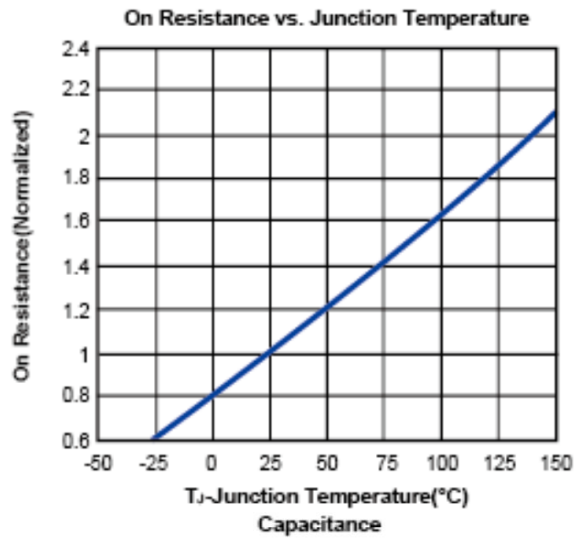

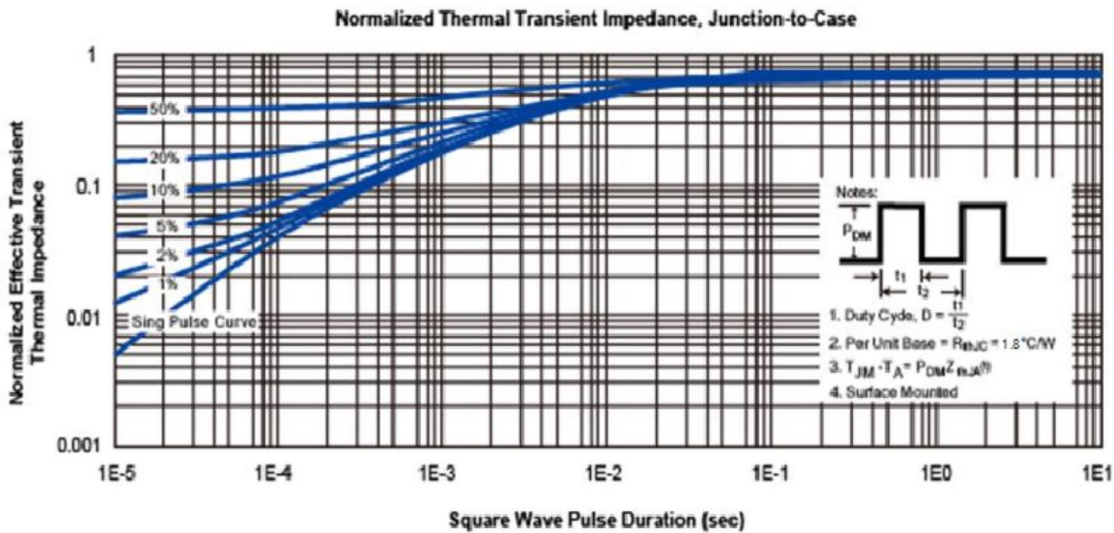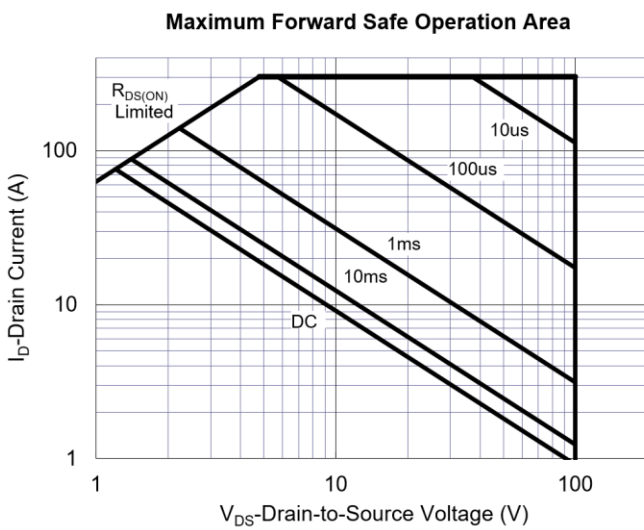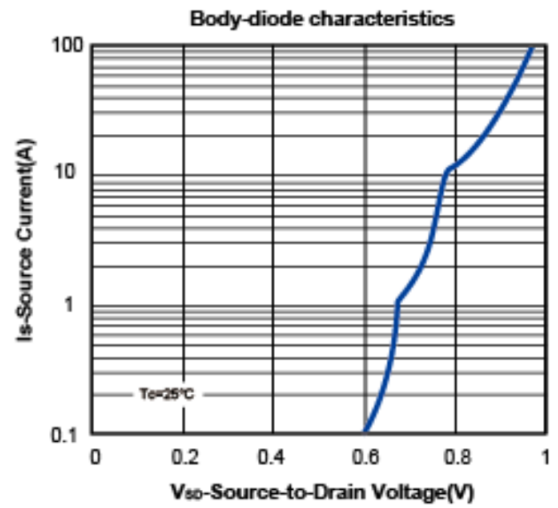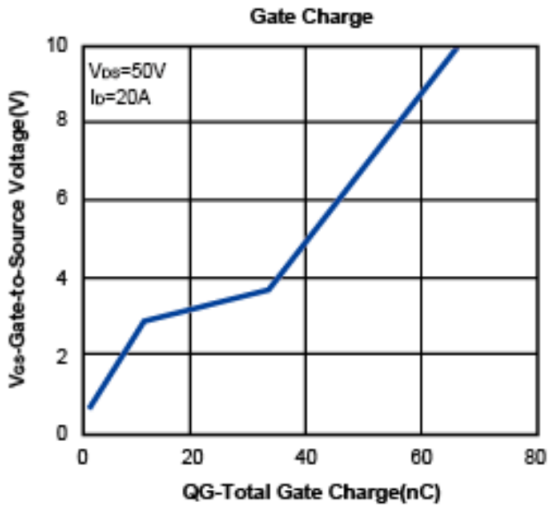

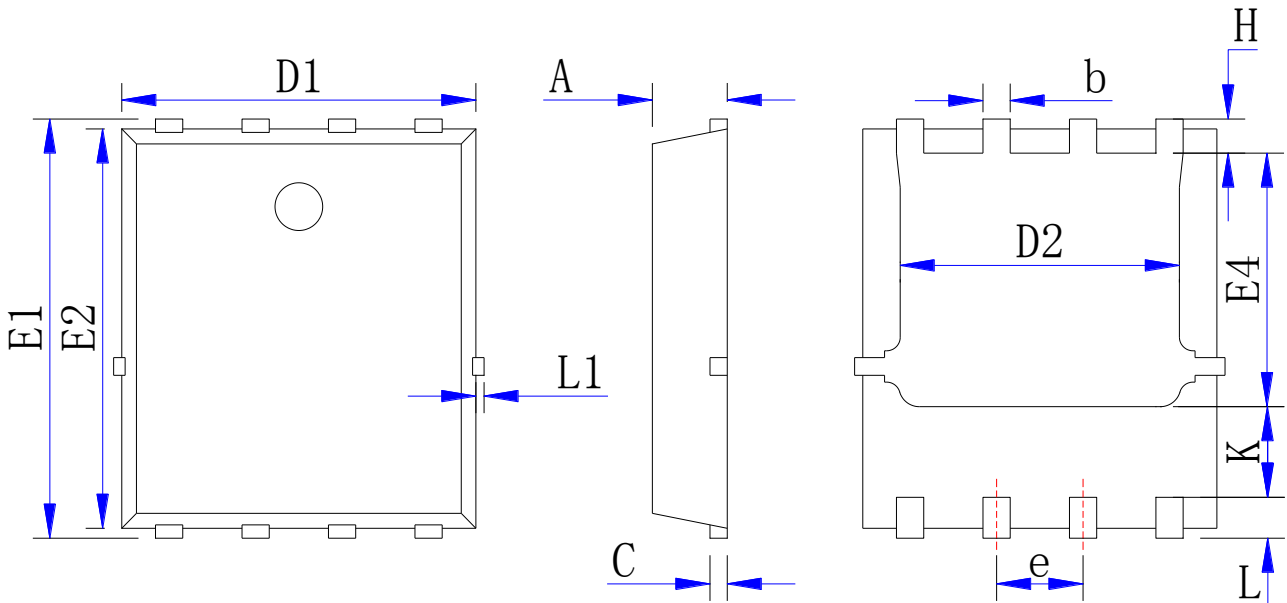**Package Dimensions**
**PDFN5x6**


SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.00	1.10	1.20	0.039	0.043	0.047
b	0.30	0.40	0.50	0.012	0.016	0.020
C	0.154	0.254	0.354	0.006	0.010	0.014
D1	5.00	5.20	5.40	0.197	0.205	0.213
D2	3.80	4.10	4.25	0.150	0.161	0.167
E1	5.95	6.15	6.35	0.234	0.242	0.250
E2	5.66	5.86	6.06	0.223	0.231	0.239
E4	3.52	3.72	3.92	0.139	0.146	0.154
e	1.17	1.27	1.37	0.046	0.050	0.054
H	0.40	0.50	0.60	0.016	0.020	0.024
K	1.15	1.30	1.45	0.045	0.051	0.057
L	0.30	0.60	0.70	0.012	0.024	0.028
L1	—	—	0.12	—	—	0.005

**Published by****ARK Microelectronics Co., Ltd.****ADD: D26,UESTC National Science Park No. 1 Shuangxing Avenue, Chengdu, Sichuan.****All Rights Reserved.****Disclaimers**

---

ARK Microelectronics Co., Ltd. reserves the right to make change without notice in order to improve reliability, function or design and to discontinue any product or service without notice. Customers should obtain the latest relevant information before orders and should verify that such information is current and complete. All products are sold subject to ARK Microelectronics Co., Ltd's terms and conditions supplied at the time of order acknowledgement.

ARK Microelectronics Co., Ltd. warrants performance of its hardware products to the specifications at the time of sale, Testing, reliability and quality control are used to the extent ARK Microelectronics Co., Ltd deems necessary to support this warrantee. Except where agreed upon by contractual agreement, testing of all parameters of each product is not necessary performed.

ARK Microelectronics Co., Ltd. does not assume any liability arising from the use of any product or circuit designs described herein. Customers are responsible for their products and applications using ARK Microelectronics Co., Ltd's components. To minimize risk, customers must provide adequate design and operating safeguards.

ARK Microelectronics Co., Ltd. does not warrant or convey any license either expressed or implied under its patent rights, nor the rights of others. Reproduction of information in ARK Microelectronics Co., Ltd's data sheets or data books is permissible only if reproduction is without modification or alteration. Reproduction of this information with any alteration is an unfair and deceptive business practice. ARK Microelectronics Co., Ltd is not responsible or liable for such altered documentation.

Resale of ARK Microelectronics Co., Ltd's products with statements different from or beyond the parameters stated by ARK Microelectronics Co., Ltd. for the product or service voids all express or implied warranties for the associated ARK Microelectronics Co., Ltd's product or service and is unfair and deceptive business practice. ARK Microelectronics Co., Ltd is not responsible or liable for any such statements.

---

**Life Support Policy:**

ARK Microelectronics Co., Ltd's products are not authorized for use as critical components in life devices or systems without the expressed written approval of ARK Microelectronics Co., Ltd.

As used herein:

1. Life support devices or systems are devices or systems which:
    - a. are intended for surgical implant into the human body,
    - b. support or sustain life,
    - c. whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
  2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.
-